

TEST REPORT

1. Applicant

* Client Name :
* Address : 235-48 GWANGJEOK-RO GWANGJEOK-MYEON YANGJU-SI GYENGGI-DO 482-84
* Date of Receipt : 231115

2. Purpose of Report :

3. Number of Report : KH FEELUX

4. Test Standard / Item : / 231123 FNL 3D 60K-24V-C90-20x40-1M

5. Test Period : 231123 ~ 231123

6. Test Environment

* Ambient Temp. : 26.3 +- 3 °C
* Relative Humidity : 29.2 +- 10 % RH

7. Test Item

* Name of Product :
* Rating :
* Model :

8. Test Result : Refer to the attachment

Confirmation	Test by		Technical manager	
	JSY	Sign	JSY	Sign

- * The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
- * This report cannot be reporduced, except in full.
- * This report is for reference only. It cannot replace the report by standard organization(s).

Result

Report Number	Sample Name	Sample Number	Test Standard
KH FEELUX			

Test Item	Unit	Result	Notice
Beam Distribution Test		See Attachement	
ATHD	%	0.0	
CIE 1931 Cx, Cy		0.3192 , 0.3344	
Correlated Color Temperature	K	6134	
Ra		92.64	
Power Factor		1.000	
Input Voltage	V	23.907	
Input Current	A	0.786	
Input Watt	W	18.781	
Lamp Flux	lm	1458.1	
Efficient	lm/W	77.64	
luminous Intensity (Max , Center)	cd	2611 , 2611	
Illuminance	lx	2611	1 m
		653	2 m
		290	3 m

* This test result is for the sample provided by the client.

* Sample photo

[Click to load image](#)

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23:Filename 231123 FNL 3D 60K-24V-C90-20x40-1M.jdt

Lamp flux (lm) 1458

Current (A)

0.7:Operator


Total flux (lm) 1458

Power Factor

Date

2023-11-23 오후 2:19:12

Luminous Intensity Distribution

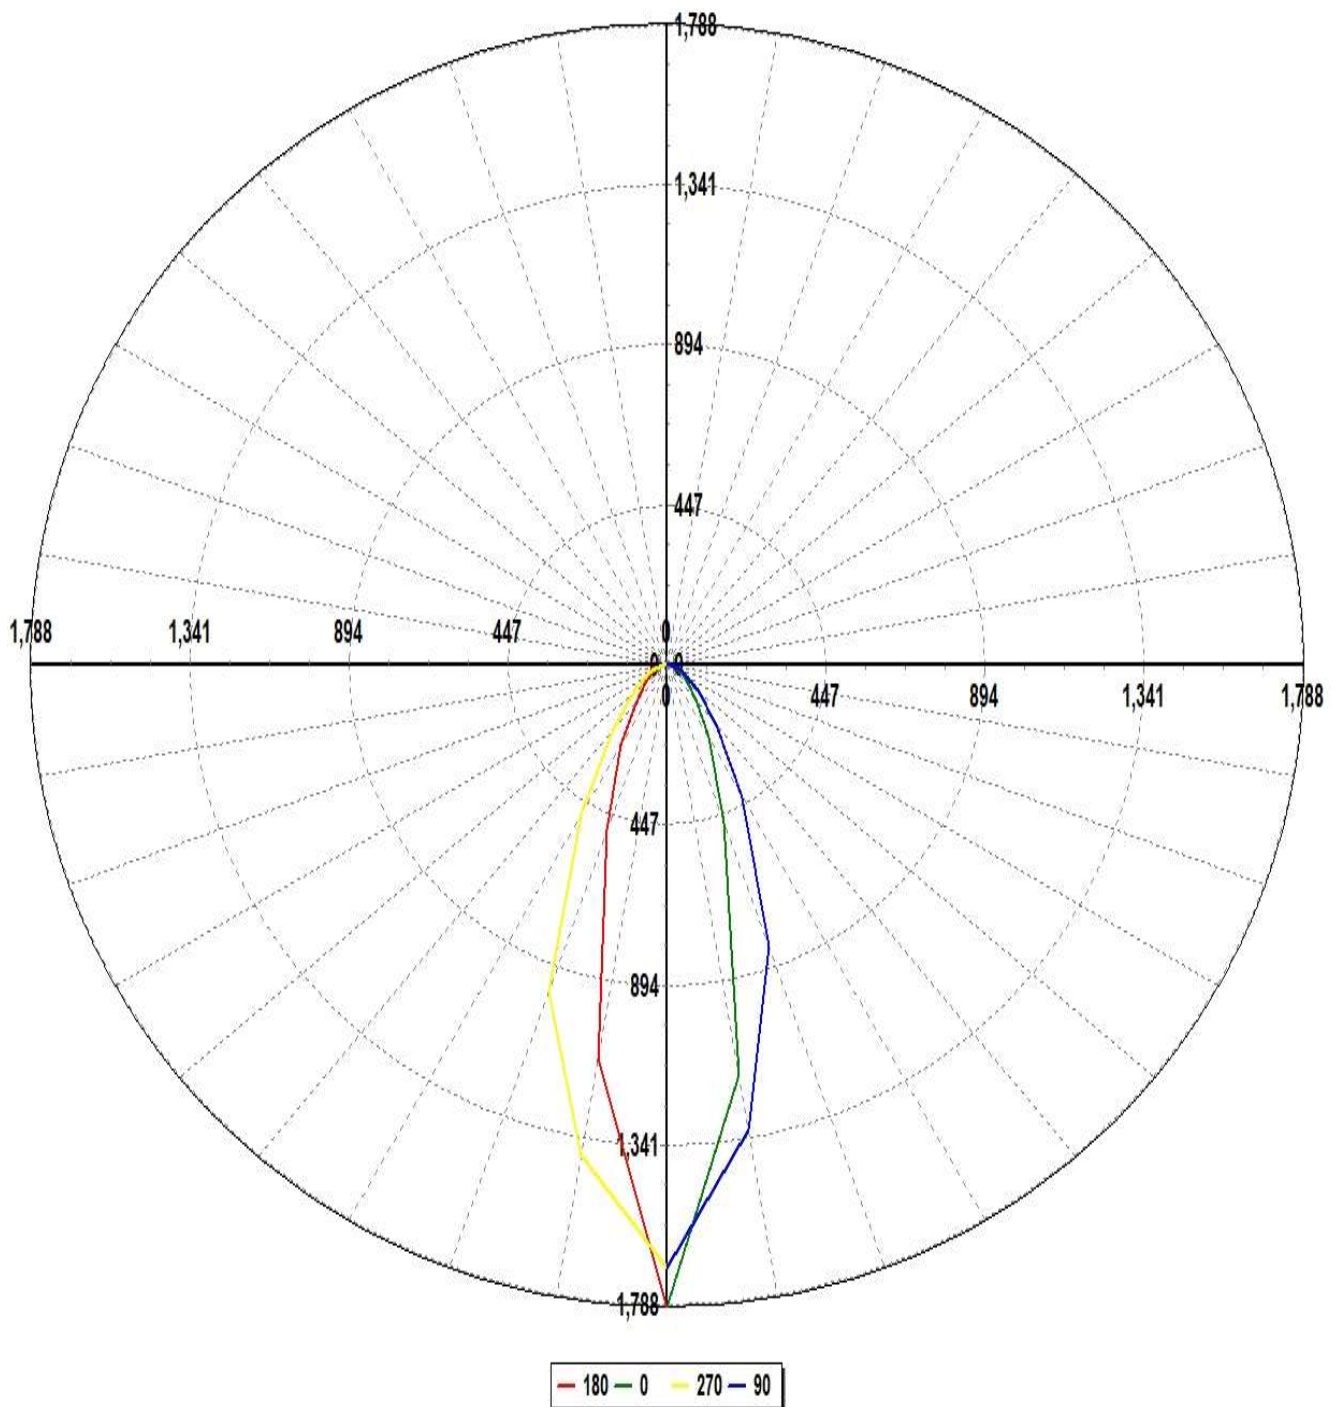

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23:Filename 231123 FNL 3D 60K-24V-C90-20x40-1M.jdt

Lamp flux (lm) 1458

Current (A)

0.7:Operator


Total flux (lm) 1458

Power Factor

Date

2023-11-23 오후 2:19:12

Luminous Intensity Distribution (Lowest 10%)

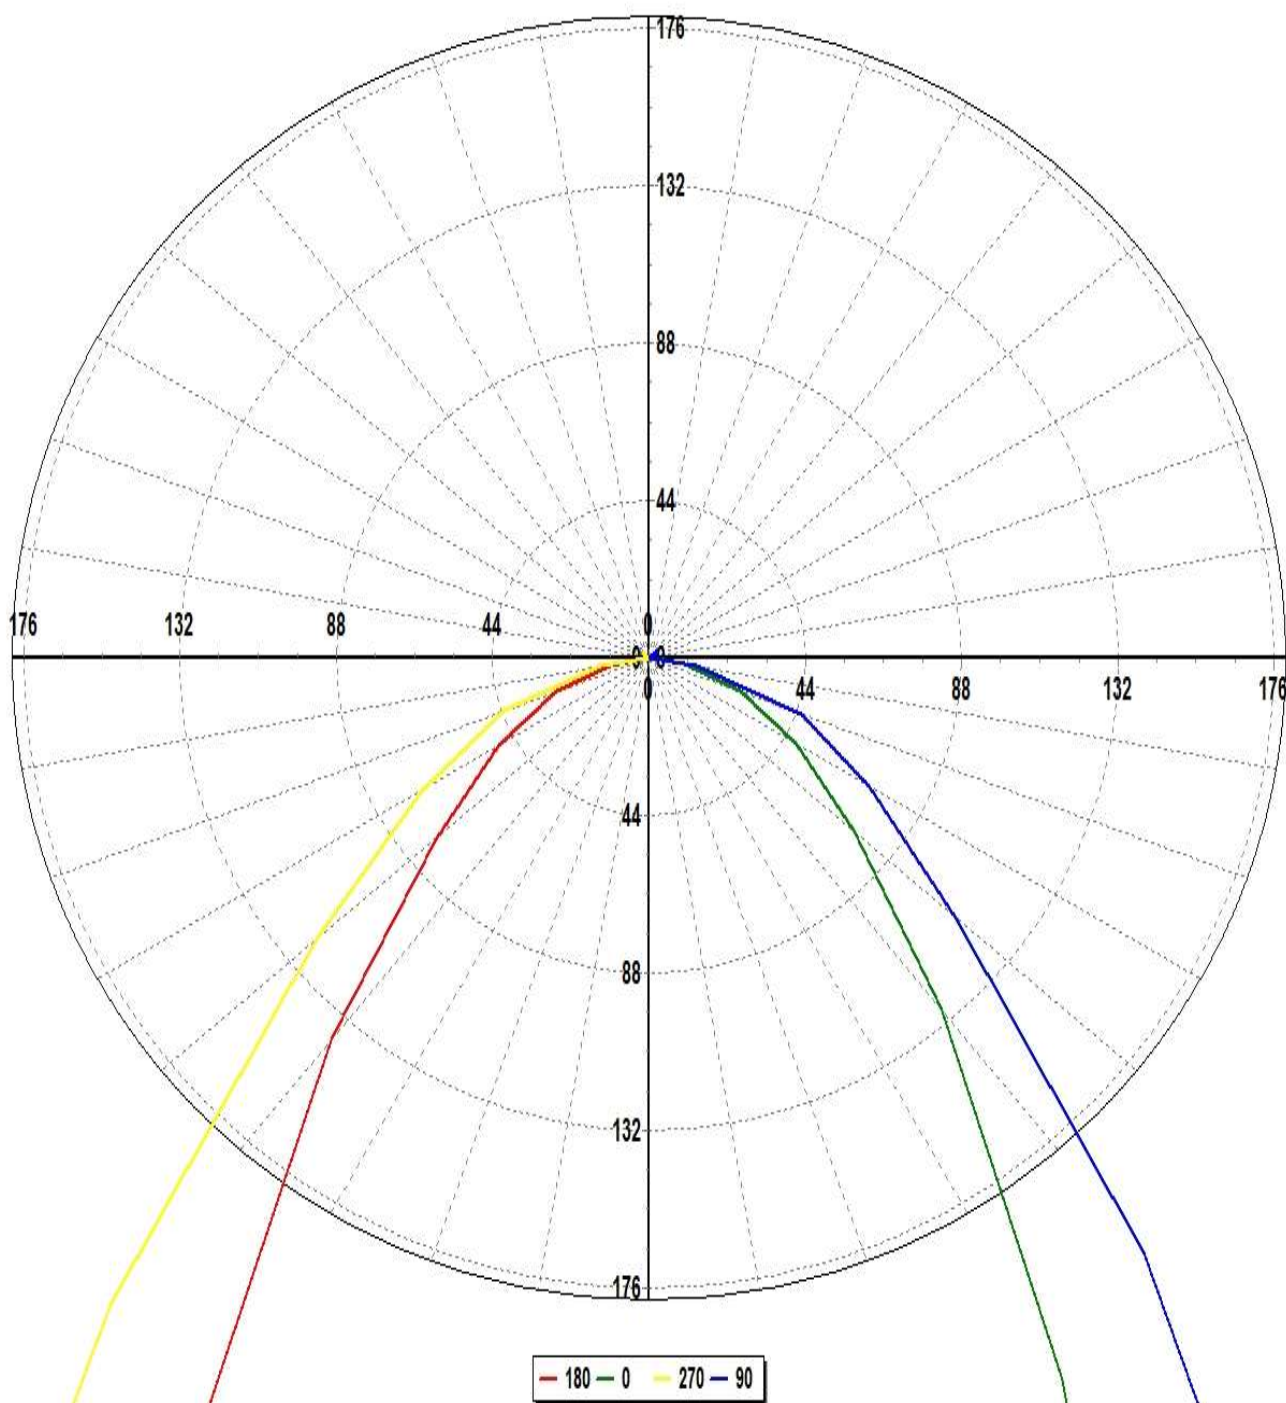

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23:Filename 231123 FNL 3D 60K-24V-C90-20x40-1M.jdt

Lamp flux (lm) 1458

Current (A)

0.7Operator

Total flux (lm) 1458

Power Factor

Date

2023-11-23 오후 2:19:12

Luminous Intensity Data

Maximum (cd) : 2611

Minimum (cd) : 0

G/C	0	30	60	90	120	150	180	210	240	270
0	2611.43	2566.59	2529.16	2456.33	2396.74	2376.65	2611.43	2566.59	2529.16	2456.33
10	1694.01	1505.36	1957.88	1924.23	2001.54	1591.12	1632.82	2066.31	2040.33	2022.08
20	684.06	684.91	971.64	1221.12	999.5	711.42	717.65	862.34	1062.79	1415.26
30	339.1	366.75	486.64	617	491.88	378.72	374.82	429.26	555.03	700.28
40	186.22	199.83	254.41	315.92	253.37	203.86	202.05	224.67	281.96	343.62
50	110.05	121.72	149.11	164.63	149.1	122.32	114.21	131.43	158.54	178.04
60	69.85	77.25	95.16	104.2	94.31	74.37	71.01	80.51	97.86	107.16
70	39.87	42.66	57.23	66.78	56.99	41.6	40.2	43.71	57.78	63.55
80	14.78	16.67	20.66	19.91	20.53	15.94	16.24	17.34	20.05	20.01
90	1.75	1.49	1.52	0.25	1.34	1.91	1.49	1.75	1.36	0.66
100	1.38	1.16	0.52	0.43	0.78	0.78	0.5	0.61	1.24	1.04
110	1.04	1.65	2.12	2.22	2.07	1.96	1.07	1.75	1.93	1.93
120	2.46	2.88	2.41	2.15	2.91	2.84	1.66	2.59	2.42	2.19
130	3.53	4.57	4.97	4.68	4.62	3.78	3.48	3.57	4.07	3.48

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23:Filename 231123 FNL 3D 60K-24V-C90-20x40-1M.jdt

Lamp flux (lm) 1458

Current (A)

0.7:Operator

Total flux (lm) 1458

Power Factor

Date

2023-11-23 오후 2:19:12

Luminous Intensity Data (Continued)

Maximum (cd) : 2611

Minimum (cd) : 0

G/C	300	330	360
0	2396.74	2376.65	2611.43
10	1711.58	1776.27	1694.01
20	880.67	784.15	684.06
30	476.84	388.31	339.1
40	248.73	210.04	186.22
50	147.99	126.32	110.05
60	94.15	79.87	69.85
70	57.38	45.35	39.87
80	20.12	18.54	14.78
90	1.96	2.42	1.75
100	1.94	1.09	1.38
110	1.83	1.4	1.04
120	1.61	2.38	2.46
130	3.9	3.76	3.53

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23:Filename 231123 FNL 3D 60K-24V-C90-20x40-1M.jdt

Lamp flux (lm) 1458

Current (A)

0.7Operator

Total flux (lm) 1458

Power Factor

Date

2023-11-23 오후 2:19:12

Luminous Flux Table

Total Lamp Lumens: 1458.1

Luminaire Efficiency (lm/W): 77.64

CIE Classification: Direct

Elevation	Lumens	Cumulative	Lamp %	Luminaire %
0	59.52	59.52	4.08	4.08
10	347.46	406.98	27.91	27.91
20	343.24	750.22	51.45	51.45
30	255.76	1005.98	68.99	68.99
40	171.58	1177.57	80.76	80.76
50	117.00	1294.57	88.78	88.78
60	82.65	1377.22	94.45	94.45
70	52.58	1429.80	98.06	98.06
80	19.85	1449.65	99.42	99.42
90	1.64	1451.28	99.53	99.53
100	1.03	1452.31	99.60	99.60
110	1.80	1454.11	99.73	99.73
120	2.25	1456.36	99.88	99.88
130	1.75	1458.12	100.00	100.00

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23:Filename 231123 FNL 3D 60K-24V-C90-20x40-1M.jdt

Lamp flux (lm) 1458

Current (A)

0.7:Operator


Total flux (lm) 1458

Power Factor

Date

2023-11-23 오후 2:19:12

IsoCandela (Type C)

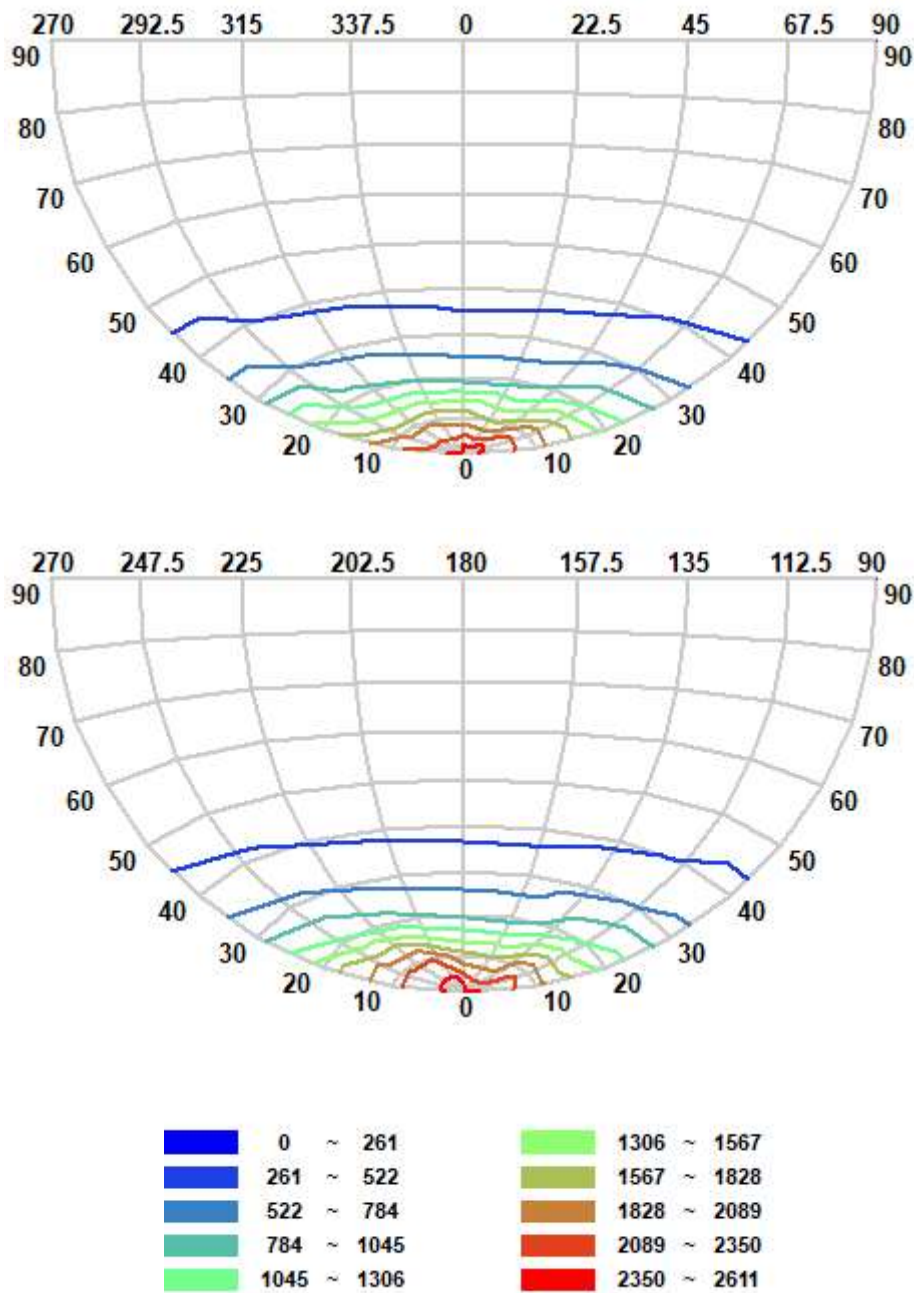

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23:Filename 231123 FNL 3D 60K-24V-C90-20x40-1M.jdt

Lamp flux (lm) 1458

Current (A)

0.7:Operator


Total flux (lm) 1458

Power Factor

Date

2023-11-23 오후 2:19:12

IsoLux Diagram (Ground)

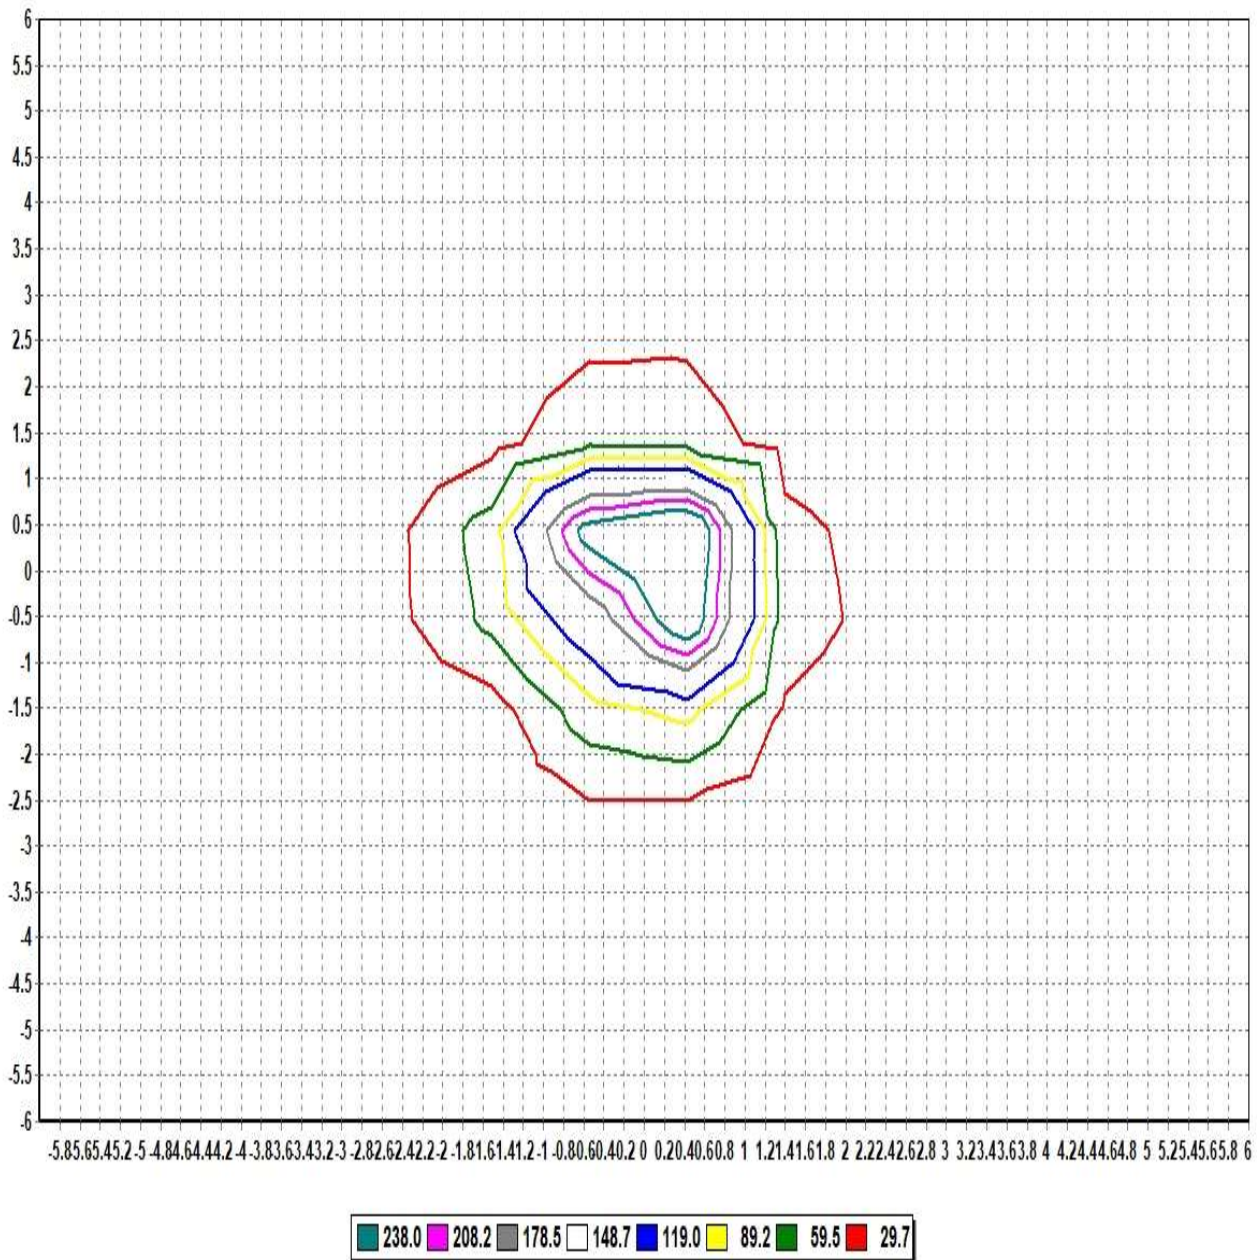

Pole Height (m): 2.7

Area Width (m): 12

Total Optical Solution Provider

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23:Filename 231123 FNL 3D 60K-24V-C90-20x40-1M.jdt

Lamp flux (lm) 1458

Current (A)

0.7Operator


Total flux (lm) 1458

Power Factor

Date

2023-11-23 오후 2:19:12

IsoLux Diagram (Wall)

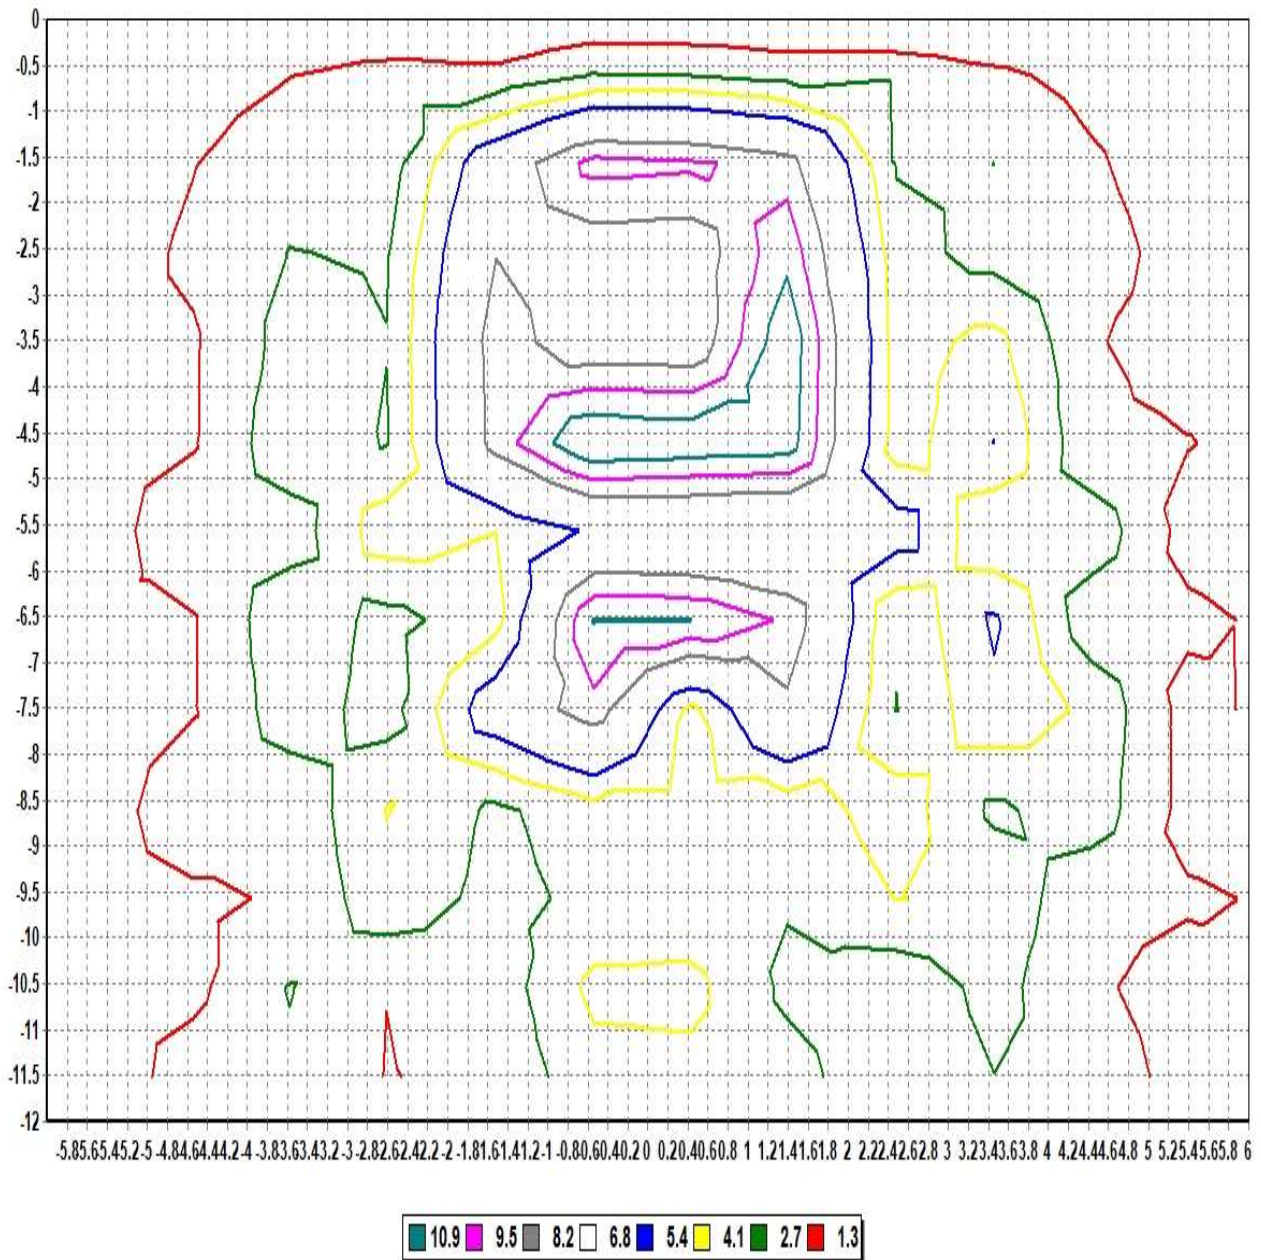

Pole Height (m): 2.7

Wall Distance (m): 2.7

Aiming Plane: 0

Wall Height (m): 12

Total Optical Solution Provider

Luminaire KH FEELUX

Lamp

No. of lamps	1	Voltage (V)	23.907
Lamp flux (lm)	1458	Current (A)	0.7856
Total flux (lm)	1458	Power Factor	1

Report

KH FEELUX

Filename 231123 FNL 3D 60K-24V-C90-20x40-1M.jdt

Operator

Date 2023-11-23 오후 2:19:12

Illuminance Levels (Ground)



6.00	0.35	0.47	0.40	0.47	0.60	0.69	0.78	0.72	0.49	0.36	0.34	0.41	0.25
5.00	0.37	0.41	0.60	0.86	1.66	2.01	2.28	2.06	1.40	0.76	0.51	0.28	0.33
4.00	0.27	0.45	1.44	2.23	1.93	2.66	3.09	2.67	1.60	1.98	1.06	0.40	0.25
3.00	0.44	0.59	1.77	2.41	7.74	6.05	8.00	5.13	6.36	1.78	1.56	0.56	0.35
2.00	0.52	1.53	1.86	5.41	9.20	16.90	29.92	13.32	6.51	4.83	1.54	1.28	0.43
1.00	0.49	1.52	1.97	5.39	16.06	65.35	215.09	41.10	12.81	4.55	2.01	1.56	0.52
0.00	0.50	1.58	2.12	5.41	18.65	181.36	358.22	187.93	17.03	5.14	2.07	1.52	0.50
-1.00	0.49	1.54	1.97	4.85	14.38	47.05	226.52	68.68	15.82	5.42	1.99	1.51	0.49
-2.00	0.44	1.36	1.61	5.22	7.05	14.98	33.27	16.83	9.57	5.54	1.86	1.54	0.53
-3.00	0.36	0.56	1.63	1.86	7.00	5.52	8.66	6.22	8.33	2.46	1.82	0.64	0.45
-4.00	0.25	0.41	1.12	2.10	1.67	2.80	3.26	2.78	1.93	2.36	1.48	0.47	0.29
-5.00	0.34	0.28	0.52	0.78	1.49	2.20	2.45	2.14	1.69	0.86	0.59	0.40	0.39
-6.00	0.26	0.42	0.34	0.37	0.51	0.72	0.78	0.69	0.60	0.47	0.38	0.47	0.35
-6.00	-5.00	-4.00	-3.00	-2.00	-1.00	0.00	1.00	2.00	3.00	4.00	5.00	6.00	

Illum. (Max.) : 358.22

Illum. (Min.) : 0.2474

Illum. (Avg.) : 11.265

All illuminance level values are in lux.



Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23:Filename 231123 FNL 3D 60K-24V-C90-20x40-1M.jdt

Lamp flux (lm) 1458

Current (A)

0.7:Operator


Total flux (lm) 1458

Power Factor

Date

2023-11-23 오후 2:19:12

Illuminance Cone Diagram

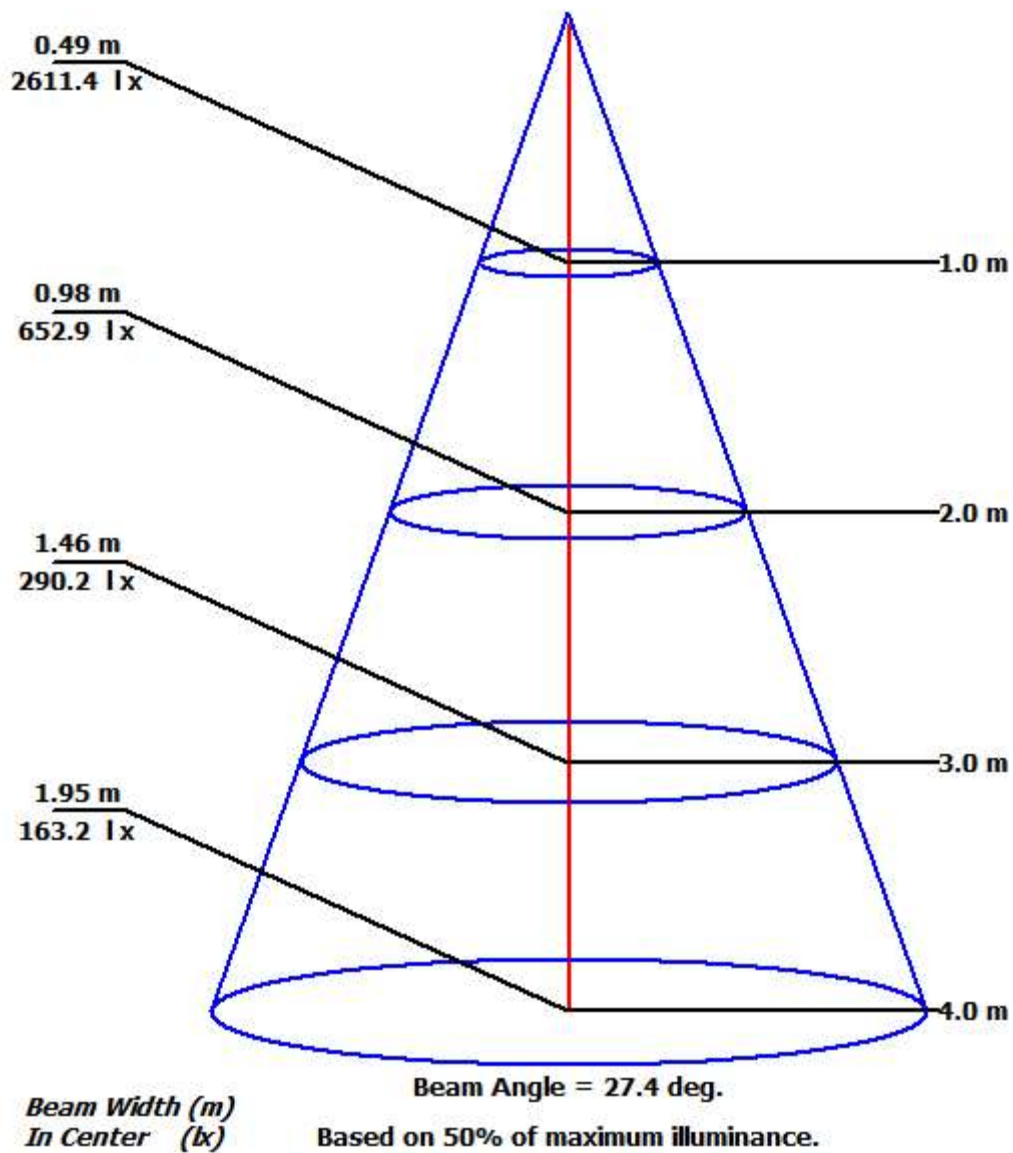

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1 Voltage (V) 23.907

Filename 231123 FNL 3D 60K-24V-C90-20x40-1M.jdt

Lamp flux (lm) 1458 Current (A) 0.7856

Operator

Total flux (lm) 1458 Power Factor 1

Date 2023-11-23 오후 2:19:12

Coefficient of Utilization

	Refl. Ceiling (%)	80%	80%	80%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	10%	0%
	Refl. Wall (%)	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
Eff. Floor Cavity	Refl.	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%
Room CR	0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	4	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	5	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	6	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	7	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	8	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	9	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR	10	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00