

TEST REPORT

1. Applicant

* Client Name : KH FEELUX Co. Ltd.
* Address : 235-48 Gwangjeok-ro Gwangjeok-myeon Yangju-Si Gyeonggi-do South Korea
* Date of Receipt : 240523

2. Purpose of Report :**3. Number of Report :** KH FEELUX**4. Test Standard / Item :** / 240613 FNL 3D 35K-24V-C90-20D-1M**5. Test Period :** 240613 ~ 240613**6. Test Environment**

* Ambient Temp. : 25.0 +- 3 °C
* Relative Humidity : 60.0 +- 10 % RH

7. Test Item

* Name of Product :
* Rating :
* Model :

8. Test Result : Refer to the attachment

Confirmation	Test by		Technical manager	
	장상윤	Sign	장상윤	Sign

- * The result shown in this test report refer only to the sample(s) tested unless otherwise stated.
- * This report cannot be reproduced, except in full.
- * This report is for reference only. It cannot replace the report by standard organization(s).

Result

Report Number	Sample Name	Sample Number	Test Standard
KH FEELUX			

Test Item	Unit	Result	Notice
Beam Distribution Test		See Attachement	
ATHD	%	0.0	
CIE 1931 Cx, Cy		0.4053 , 0.3857	
Correlated Color Temperature	K	3462	
Ra		93.45	
Power Factor		1.000	
Input Voltage	V	23.897	
Input Current	A	0.826	
Input Watt	W	19.74	
Lamp Flux	lm	1474.9	
Efficient	lm/W	74.72	
luminous Intensity (Max , Center)	cd	2920 , 2851	
Illuminance	lx	2851	1 m
		713	2 m
		317	3 m

* This test result is for the sample provided by the client.

* Sample photo

Click to load image

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23.89Filename 240613 FNL 3D 35K-24V-C90-20D-1M.jdt

Lamp flux (lm) 1475

Current (A)

0.82Operator


Total flux (lm) 1475

Power Factor

Date

2024-06-13 오후 1:58:17

Luminous Intensity Distribution

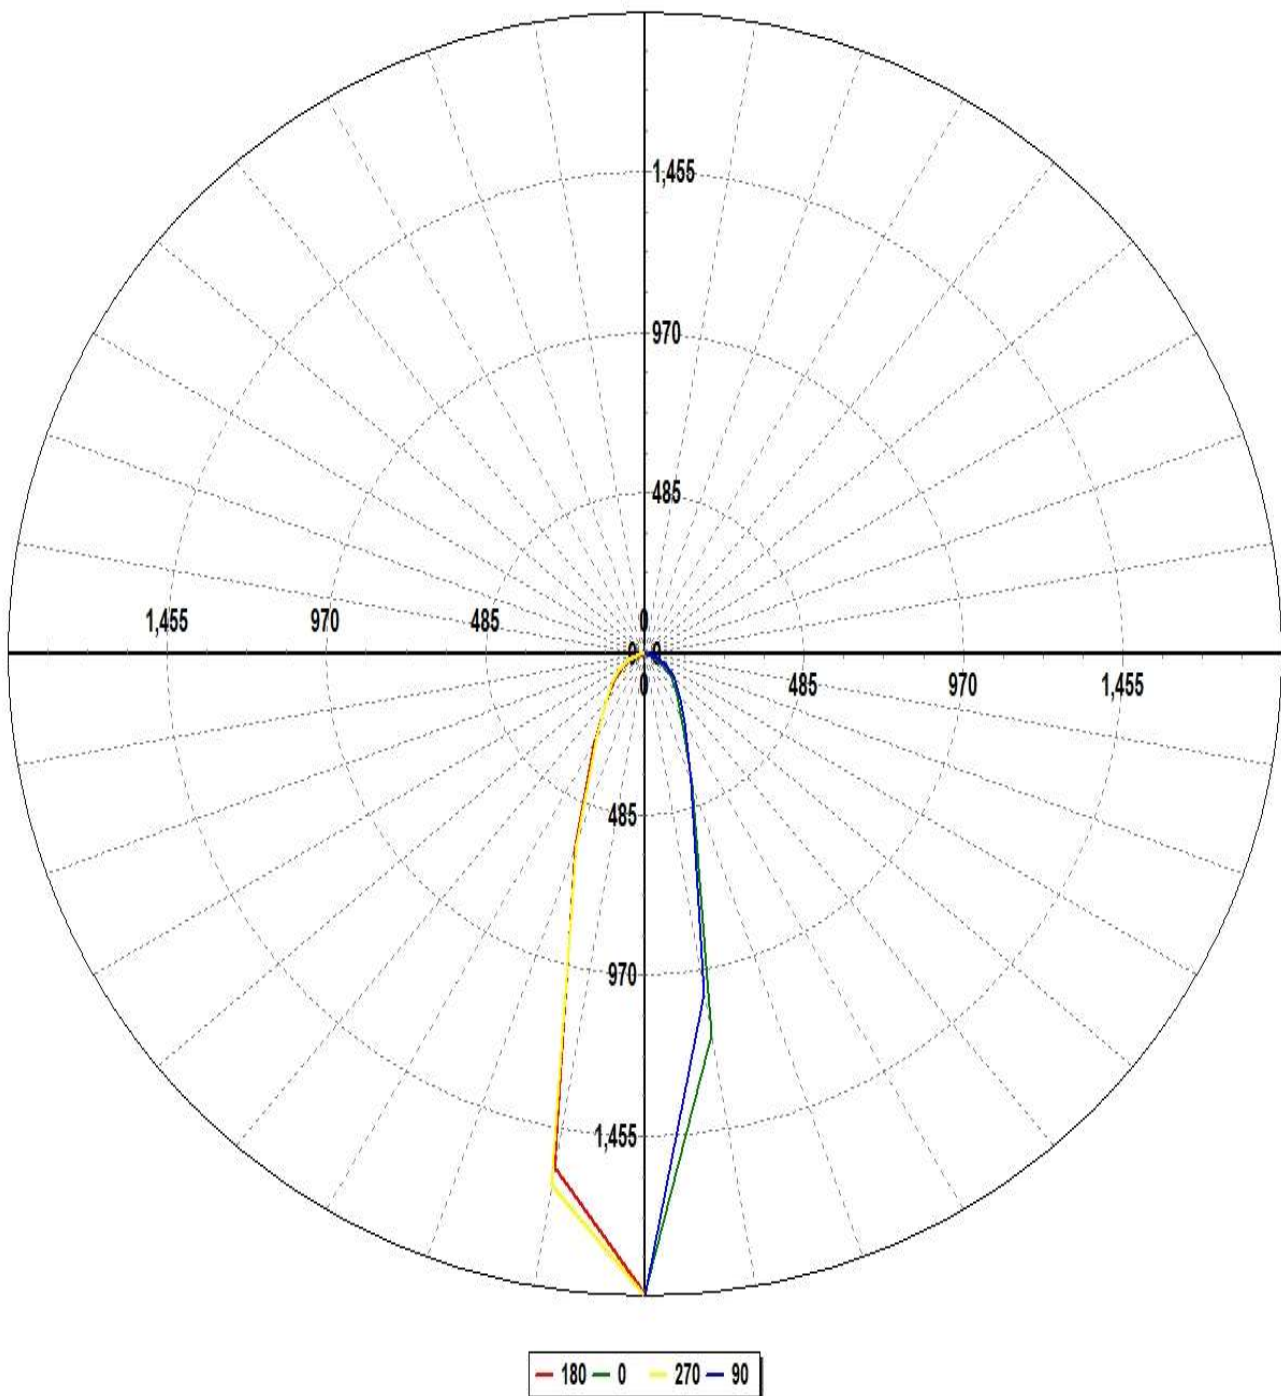

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23.89Filename 240613 FNL 3D 35K-24V-C90-20D-1M.jdt

Lamp flux (lm) 1475

Current (A)

0.82Operator


Total flux (lm) 1475

Power Factor

Date

2024-06-13 오후 1:58:17

Luminous Intensity Distribution (Lowest 10%)

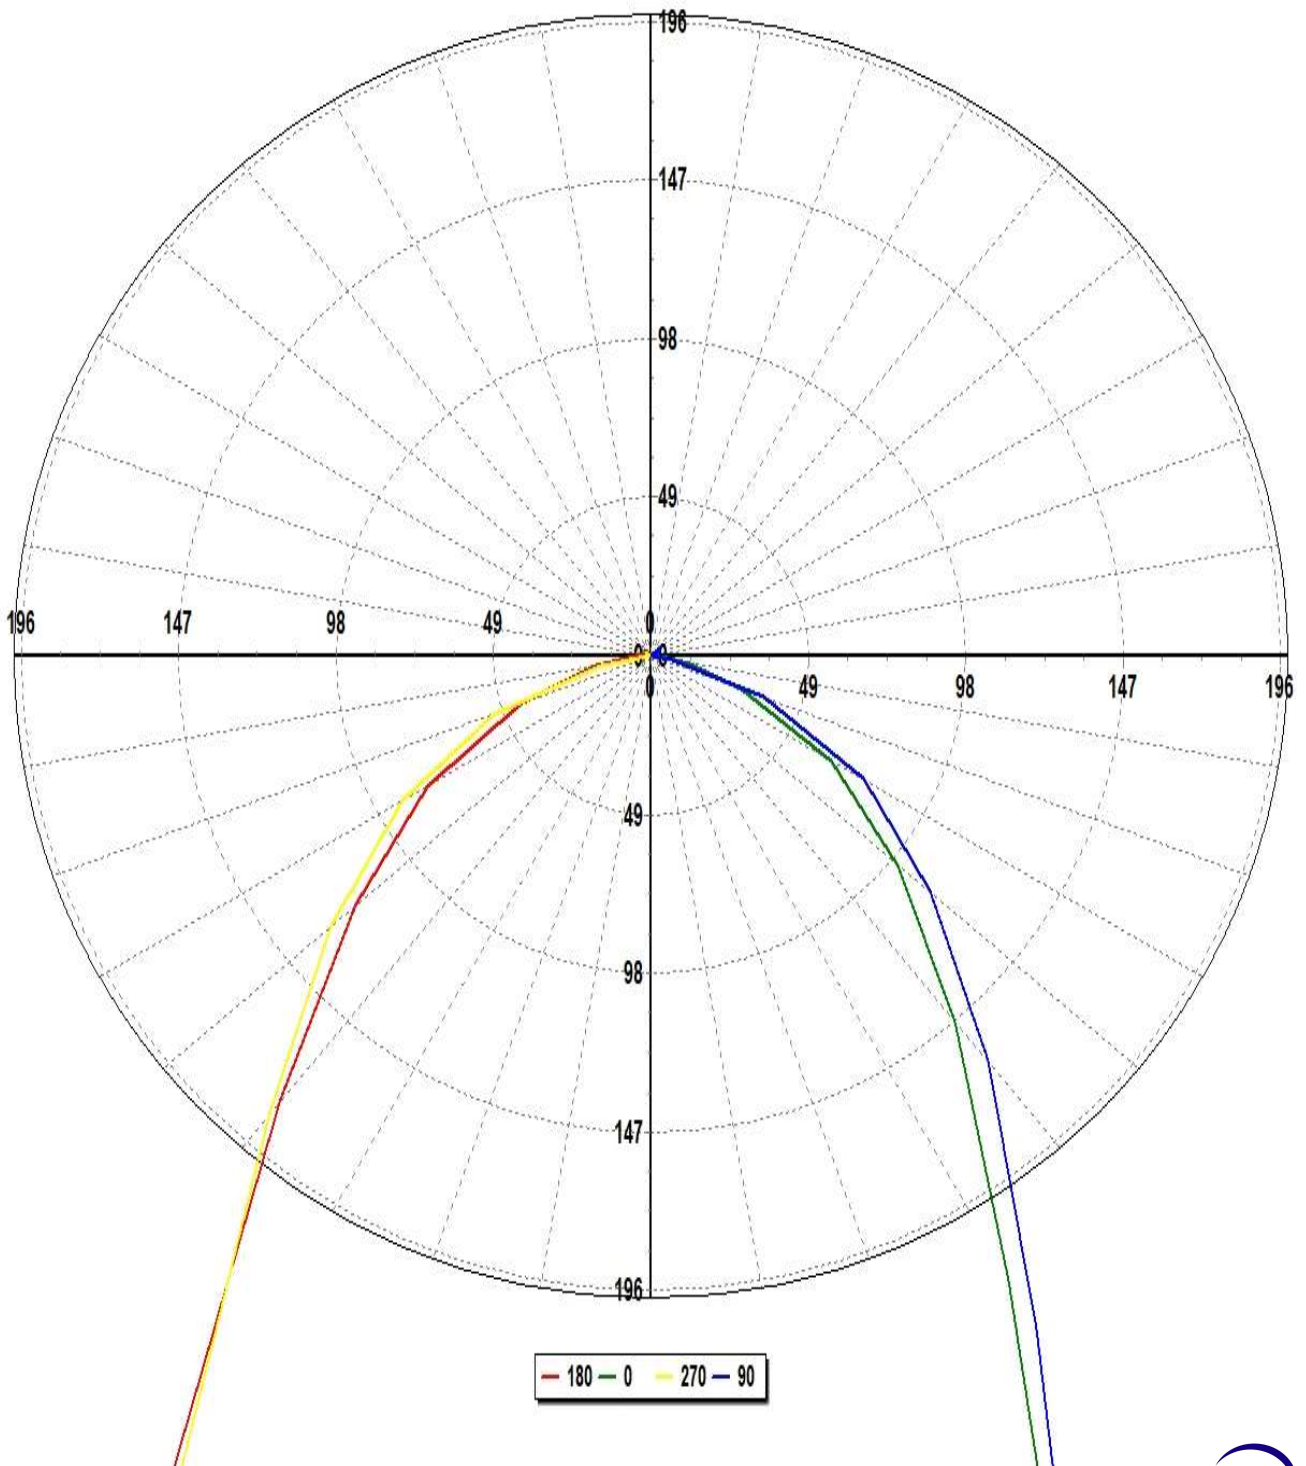

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps	1	Voltage (V)	23.8V	Filename	240613 FNL 3D 35K-24V-C90-20D-1M.jdt
Lamp flux (lm)	1475	Current (A)	0.82	Operator	
Total flux (lm)	1475	Power Factor		Date	2024-06-13 오후 1:58:17

Luminous Intensity Data

Maximum (cd) : 2920

Minimum (cd) : 1

G/C	0	30	60	90	120	150	180	210	240	270
0	2851.16	2823.94	2847.45	2860.66	2895.43	2919.61	2851.16	2823.94	2847.45	2860.66
10	1722.84	1426.39	1757.31	1540.13	1952.92	1729.42	2325.9	2601.81	2207.81	2403.12
20	614.63	568.4	637.66	611.61	703.46	665.22	916.9	1013.29	877.84	904.79
30	328.23	331.14	347.53	354.46	368.65	365.58	449.74	460.8	445.26	433.97
40	216.9	219.66	236.88	240.67	246.61	233.64	264.3	271.92	276.45	272.05
50	148.3	151.03	167.43	167.49	171.81	157.9	176.84	180.53	192.63	192.01
60	95.89	99.54	109.77	112.51	112.83	104.82	118.42	122.52	131.41	131.4
70	44.15	47.61	60.55	54.85	62.83	52.23	63.22	72.11	77.17	76.58
80	18.09	17.61	18.71	10.03	20.73	18.8	25.58	26.98	33.17	23.05
90	3.73	3.02	1.91	0.8	1.88	3.39	6.82	6.68	4.58	0.83
100	0.85	1.1	1.45	1.33	1.58	0.73	1.02	0.65	1.32	0.51
110	1.96	2.37	1.97	2.01	1.39	2.1	1.33	1.42	0.94	0.78
120	2.71	3.28	3.42	2.58	2.76	2.52	2.12	2.51	2.26	1.9
130	3.4	4.48	3.66	5.25	3.97	3.91	3.49	3.34	3.58	3.43

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23.89Filename 240613 FNL 3D 35K-24V-C90-20D-1M.jdt

Lamp flux (lm) 1475

Current (A)

0.82Operator

Total flux (lm) 1475

Power Factor

Date

2024-06-13 오후 1:58:17

Luminous Intensity Data (Continued)

Maximum (cd) : 2920

Minimum (cd) : 1

G/C	300	330	360
0	2895.43	2919.61	2851.16
10	1978.09	2256.46	1722.84
20	773.46	819.17	614.63
30	410.16	399.7	328.23
40	264.07	250.59	216.9
50	186.97	171.98	148.3
60	128.42	116.75	95.89
70	74.85	66.45	44.15
80	29.56	24.54	18.09
90	4.38	6.55	3.73
100	1.43	1.04	0.85
110	2.17	2.12	1.96
120	2.01	2.17	2.71
130	3.72	3.14	3.4

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23.89Filename 240613 FNL 3D 35K-24V-C90-20D-1M.jdt

Lamp flux (lm) 1475

Current (A)

0.82Operator

Total flux (lm) 1475

Power Factor

Date

2024-06-13 오후 1:58:17

Luminous Flux Table

Total Lamp Lumens: 1474.9

Luminaire Efficiency (lm/W): 74.71

CIE Classification: Direct

Elevation	Lumens	Cumulative	Lamp %	Luminaire %
0	68.53	68.53	4.65	4.65
10	378.82	447.35	30.33	30.33
20	284.27	731.62	49.60	49.61
30	214.26	945.88	64.13	64.13
40	175.63	1121.52	76.04	76.04
50	144.37	1265.89	85.83	85.83
60	109.42	1375.30	93.25	93.25
70	64.55	1439.85	97.62	97.63
80	23.99	1463.84	99.25	99.25
90	4.07	1467.90	99.53	99.53
100	1.17	1469.07	99.60	99.61
110	1.76	1470.84	99.72	99.73
120	2.39	1473.23	99.89	99.89
130	1.64	1474.87	100.00	100.00

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23.89Filename 240613 FNL 3D 35K-24V-C90-20D-1M.jdt

Lamp flux (lm) 1475

Current (A)

0.82Operator



Total flux (lm) 1475

Power Factor

Date

2024-06-13 오후 1:58:17

IsoCandela (Type C)

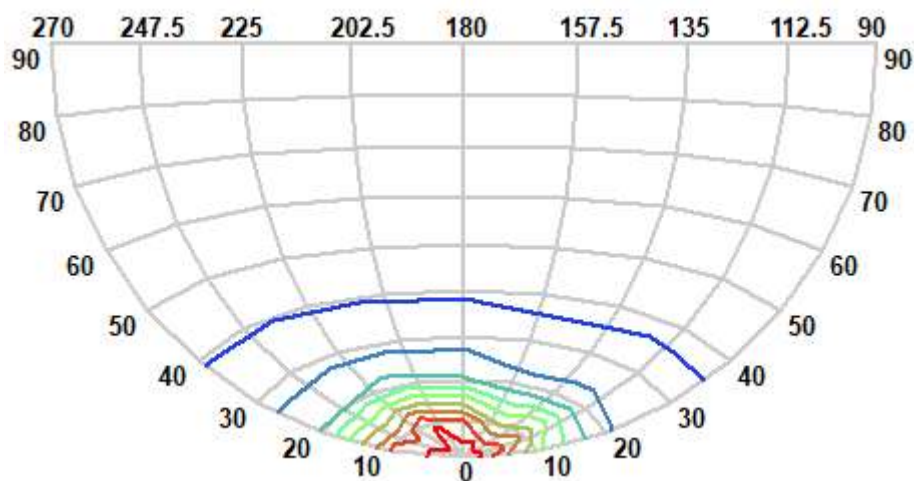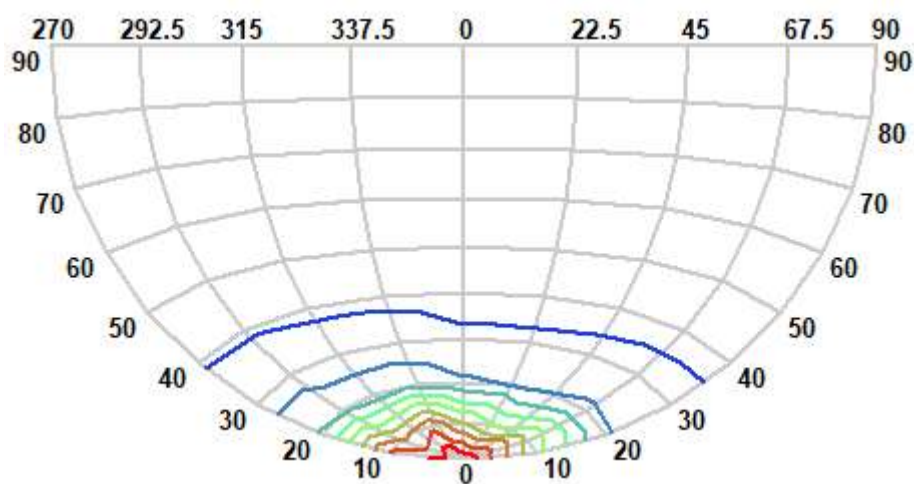

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23.89Filename 240613 FNL 3D 35K-24V-C90-20D-1M.jdt

Lamp flux (lm) 1475

Current (A)

0.82Operator


Total flux (lm) 1475

Power Factor

Date

2024-06-13 오후 1:58:17

IsoLux Diagram (Ground)

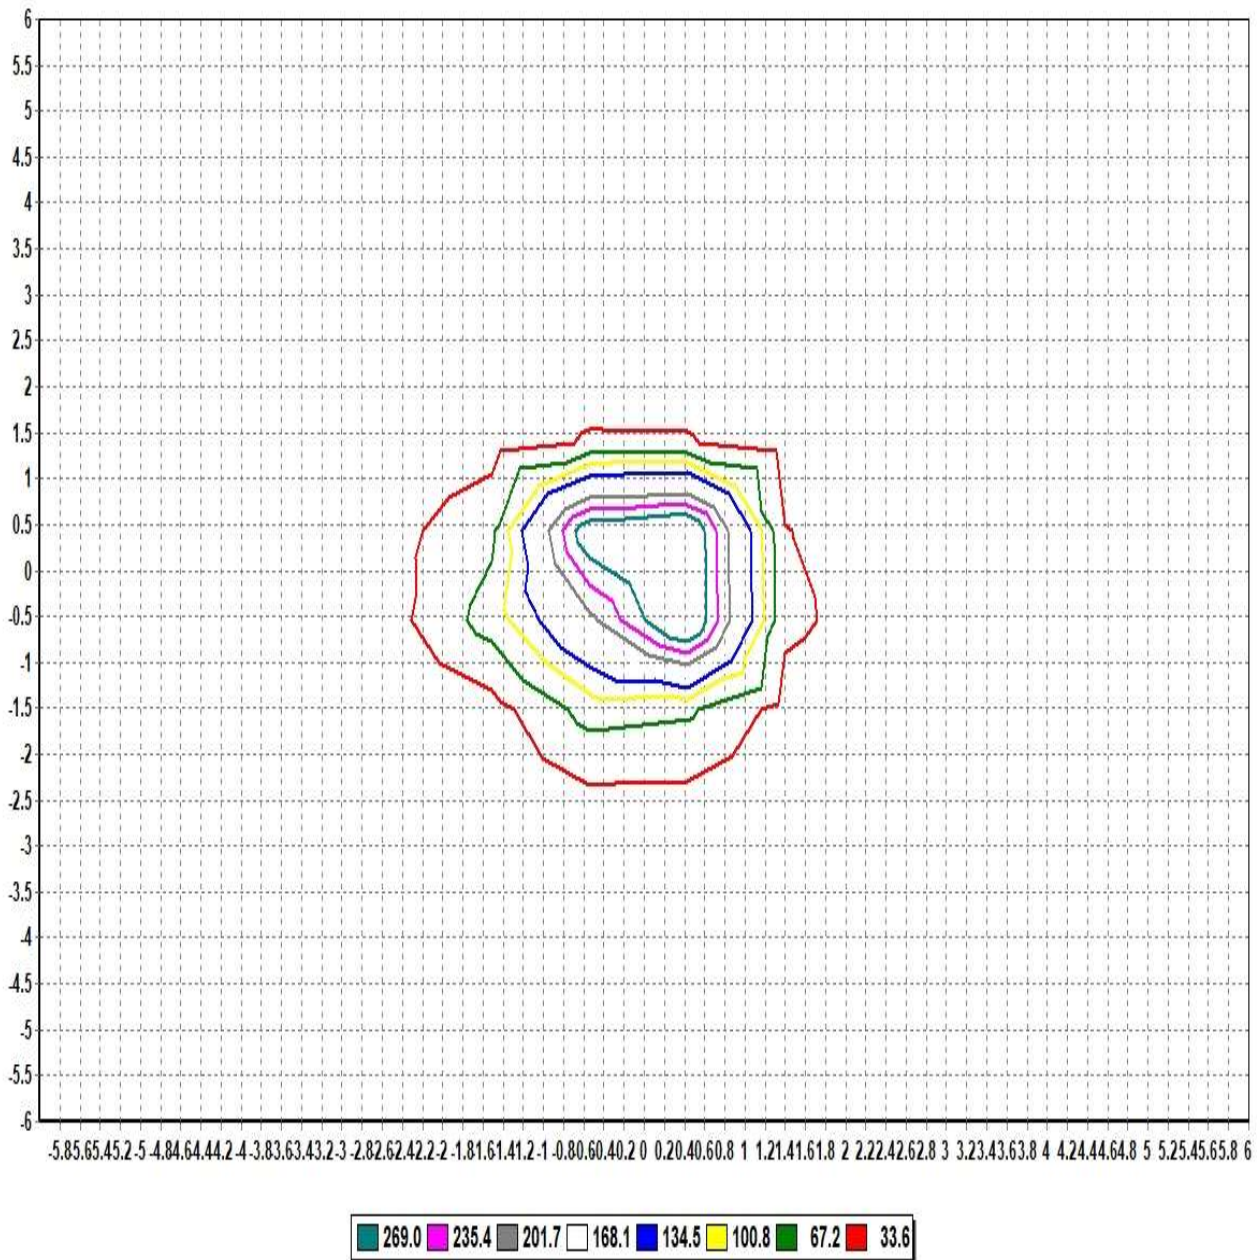

Pole Height (m): 2.7

Area Width (m): 12

Total Optical Solution Provider

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23.89Filename 240613 FNL 3D 35K-24V-C90-20D-1M.jdt

Lamp flux (lm) 1475

Current (A)

0.82Operator


Total flux (lm) 1475

Power Factor

Date

2024-06-13 오후 1:58:17

IsoLux Diagram (Wall)

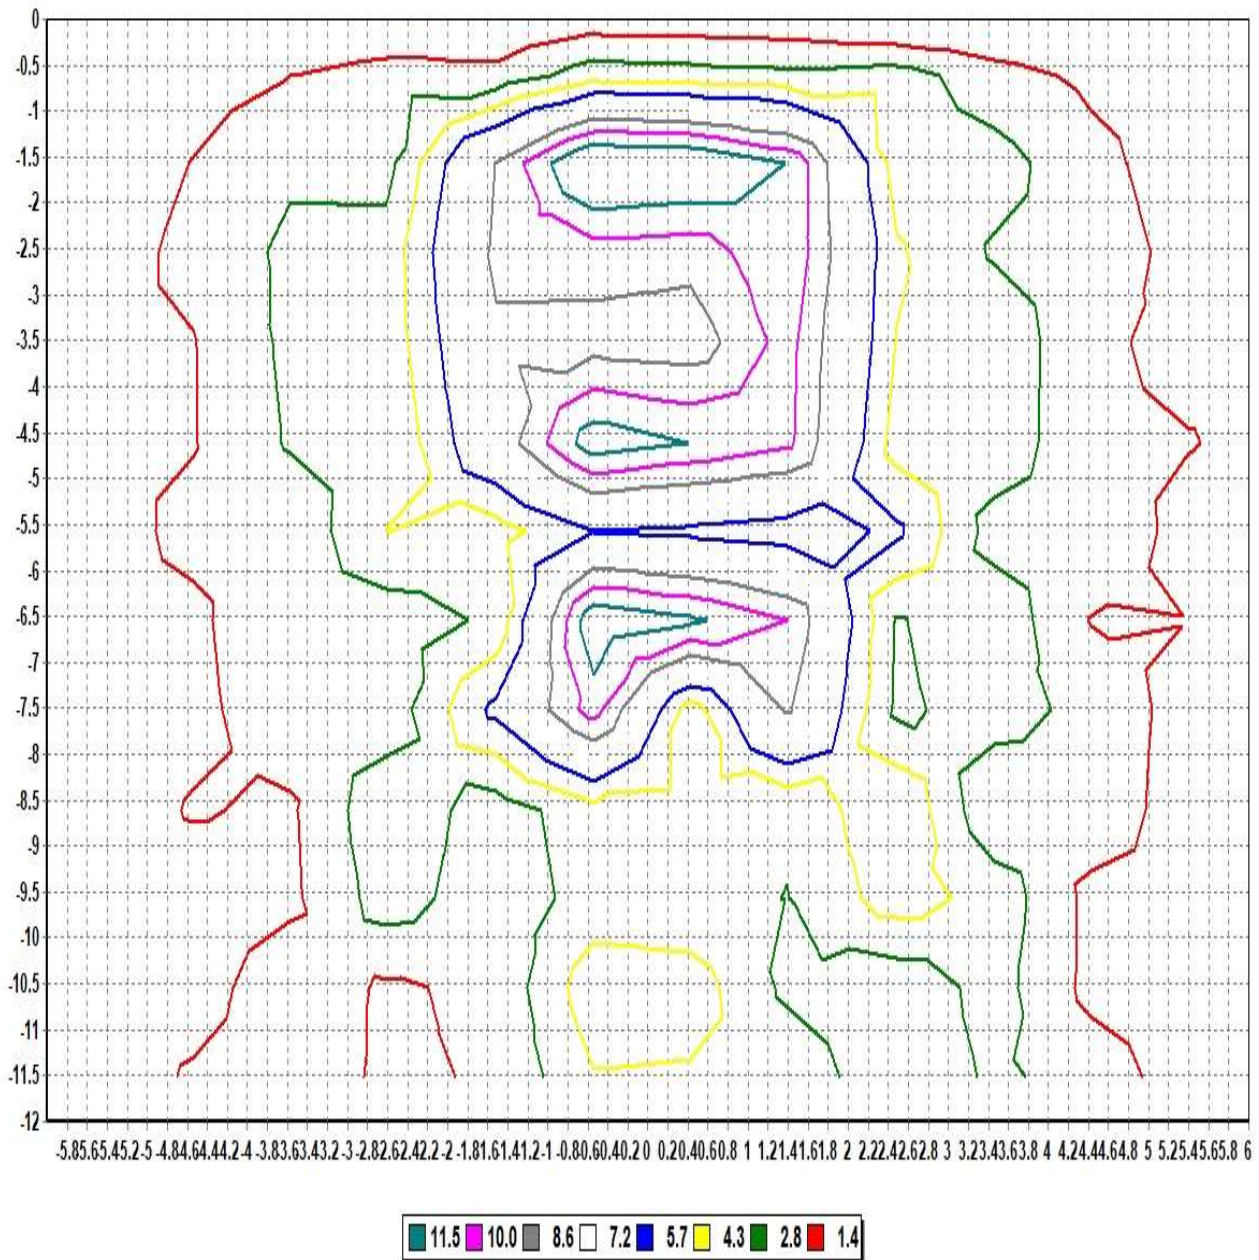

Pole Height (m): 2.7

Wall Distance (m): 2.7

Aiming Plane: 0

Wall Height (m): 12

Total Optical Solution Provider

Luminaire KH FEELUX

Lamp

No. of lamps	1	Voltage (V)	23.897
Lamp flux (lm)	1475	Current (A)	0.826
Total flux (lm)	1475	Power Factor	1

Report

KH FEELUX

Filename 240613 FNL 3D 35K-24V-C90-20D-1M.jdt

Operator

Date 2024-06-13 오후 1:58:17

Illuminance Levels (Ground)



6.00	0.38	0.51	0.35	0.51	0.63	0.73	0.75	0.72	0.57	0.42	0.36	0.49	0.33
5.00	0.49	0.40	0.59	0.84	1.87	2.19	2.33	2.19	1.70	0.86	0.57	0.31	0.44
4.00	0.33	0.56	1.58	2.35	2.26	2.91	3.23	2.92	2.02	2.27	1.39	0.48	0.28
3.00	0.51	0.79	2.24	2.69	6.44	6.53	7.48	6.04	6.29	2.35	2.07	0.71	0.41
2.00	0.62	1.84	2.24	6.24	8.89	15.69	19.94	14.15	7.90	5.77	1.99	1.64	0.52
1.00	0.74	2.22	2.93	6.39	15.65	41.12	170.82	37.32	14.00	5.76	2.80	2.13	0.73
0.00	0.82	2.46	3.41	7.98	23.39	257.95	391.11	190.83	18.19	6.65	2.81	2.06	0.63
-1.00	0.70	2.16	2.91	6.89	17.42	54.86	266.36	49.61	16.79	6.95	2.77	2.05	0.65
-2.00	0.71	1.98	2.43	7.01	9.55	17.50	23.36	16.95	9.86	6.72	2.53	2.02	0.73
-3.00	0.58	0.92	2.47	2.86	7.36	7.12	8.54	7.24	7.26	3.07	2.45	0.93	0.60
-4.00	0.40	0.65	1.67	2.65	2.46	3.41	3.74	3.41	2.56	2.66	1.78	0.67	0.41
-5.00	0.55	0.45	0.73	1.05	2.03	2.52	2.68	2.52	2.08	1.05	0.74	0.50	0.55
-6.00	0.41	0.59	0.47	0.59	0.75	0.90	0.95	0.90	0.77	0.61	0.47	0.60	0.45
-6.00	-5.00	-4.00	-3.00	-2.00	-1.00	0.00	1.00	2.00	3.00	4.00	5.00	6.00	

Illum. (Max.) : 391.11

Illum. (Min.) : 0.2798

Illum. (Avg.) : 11.966

All illuminance level values are in lux.



Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1

Voltage (V)

23.89Filename 240613 FNL 3D 35K-24V-C90-20D-1M.jdt

Lamp flux (lm) 1475

Current (A)

0.82Operator


Total flux (lm) 1475

Power Factor

Date

2024-06-13 오후 1:58:17

Illuminance Cone Diagram

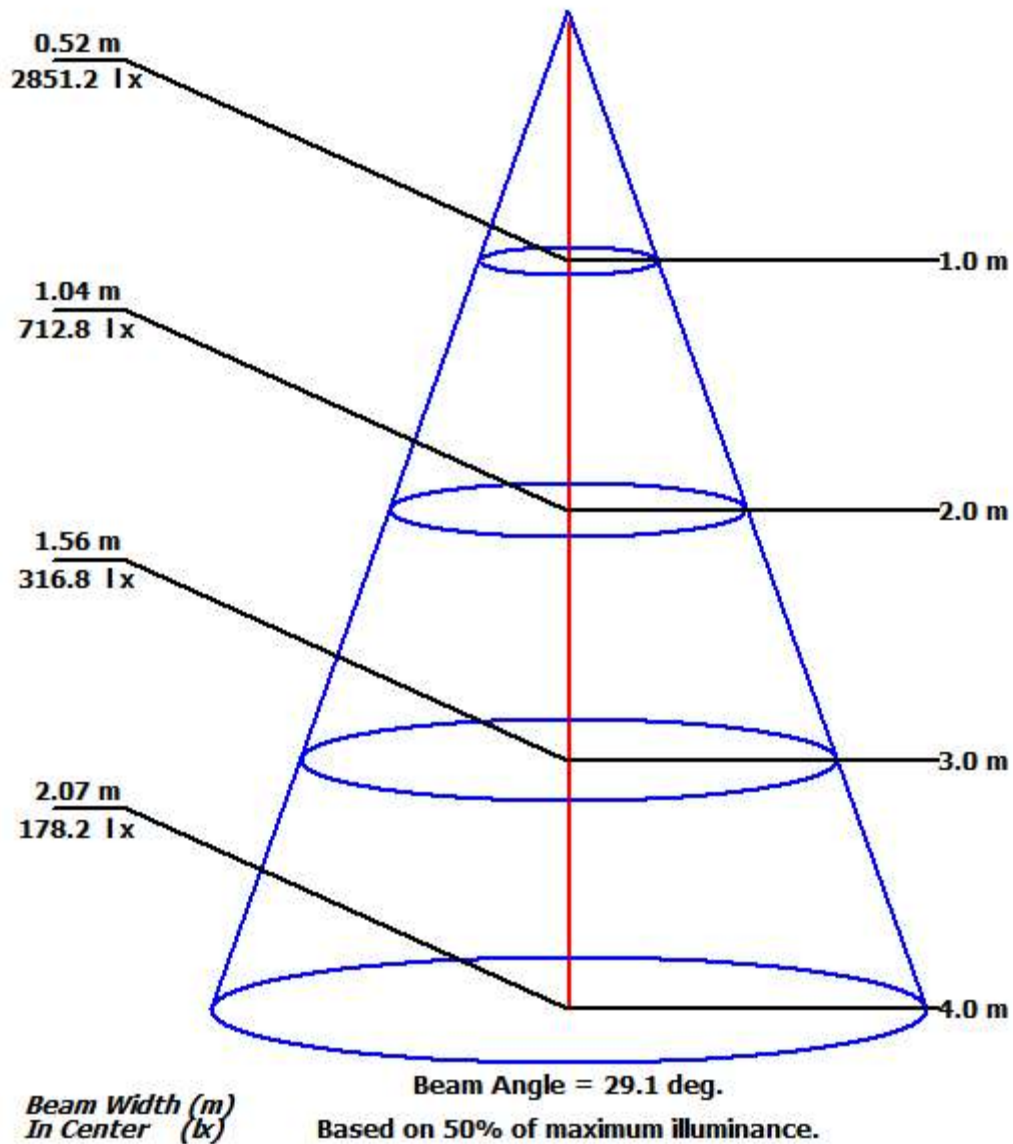

Luminaire KH FEELUX

Lamp

Report

KH FEELUX

No. of lamps 1 Voltage (V) 23.897

Filename 240613 FNL 3D 35K-24V-C90-20D-1M.jdt

Lamp flux (lm) 1475 Current (A) 0.826

Operator

Total flux (lm) 1475 Power Factor 1

Date 2024-06-13 오후 1:58:17

Coefficient of Utilization

	Refl. Ceiling (%)	80%	80%	80%	70%	70%	70%	50%	50%	50%	30%	30%	30%	10%	10%	10%	0%
	Refl. Wall (%)	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
Eff. Floor Cavity	Refl.	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%	20%
Room CR 0		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR 1		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR 2		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR 3		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR 4		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR 5		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR 6		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR 7		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR 8		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR 9		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Room CR 10		0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00